



Type LFR

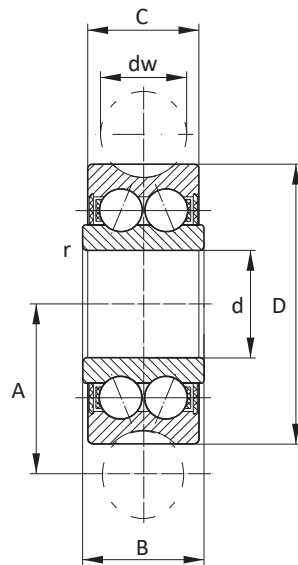

Type	ø dw [mm]	ø d [mm]	ø D [mm]	C [mm]	B [mm] - 0.12	A [mm]	r [mm]	Gewicht/ Poids [g]	Draaggetallen/Capacités de charge		Max. Belasting/ Charge Max.	
									Dyn. C <sub>W</sub> [N]	Stat. C <sub>0w</sub> [N]	F <sub>RZ</sub> [N]	F <sub>ORZ</sub> [N]
LFR50/5-4 KDD	4	5	16	7	8	9	0.20	9	1200	860	1300	1780
LFR50/5-6 KDD	6	5	17	7	8	10.5	0.20	10	1270	820	1300	1780
LFR50/8-6 KDD	6	8	24	11	11	14	0.30	20	3670	2280	1300	4560
LFR5201-10 KDD	10	12	35	15.9	15.9	20.65	0.30	66	8500	5100	5100	10200
LFR5301-10 KDD	10	12	42	19	19	24	0.60	135	13000	7700	7500	14200
LFR5302-10 KDD	10	15	47	19	19	26.65	1.00	170	16200	9200	6200	18400
LFR5201-12 KDD	12	12	35	15.9	15.9	21.75	0.30	66	8400	5000	5100	10000
LFR5204-16 KDD	16	20	52	20.6	22.6	31.5	0.60	195	16800	9500	12100	16600
LFR5206-20 KDD	20	25	72	23.8	25.8	41	0.60	435	29500	16600	20700	33200
LFR5206-25 KDD	25	25	72	23.8	25.8	43.5	0.60	425	29200	16400	23100	32800
LFR5207-30 KDD	30	30	80	27	29	51	1.00	600	38000	20800	21400	36200
LFR5208-40 KDD	40	40	98	36	38	62.5	1.00	1100	54800	29000	55000	58000
LFR5306-50 KDD	50	40	110	46	46	72.5	1.10	1250	53000	39500	69000	79000

Bestelcode/Code de commande

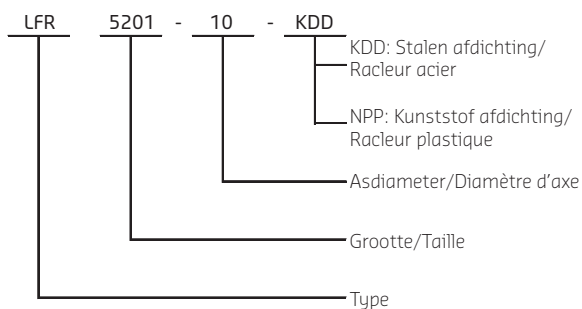

Buitendiameter ≥ 52 mm: Smeerboring op de binnenring. Andere types op aanvraag

Diamètre extérieur ≥ 52 mm: trou de graissage sur la bague intérieure. Autre type sur demande.