





VANSICHEN ALUMINIUM PROFILE

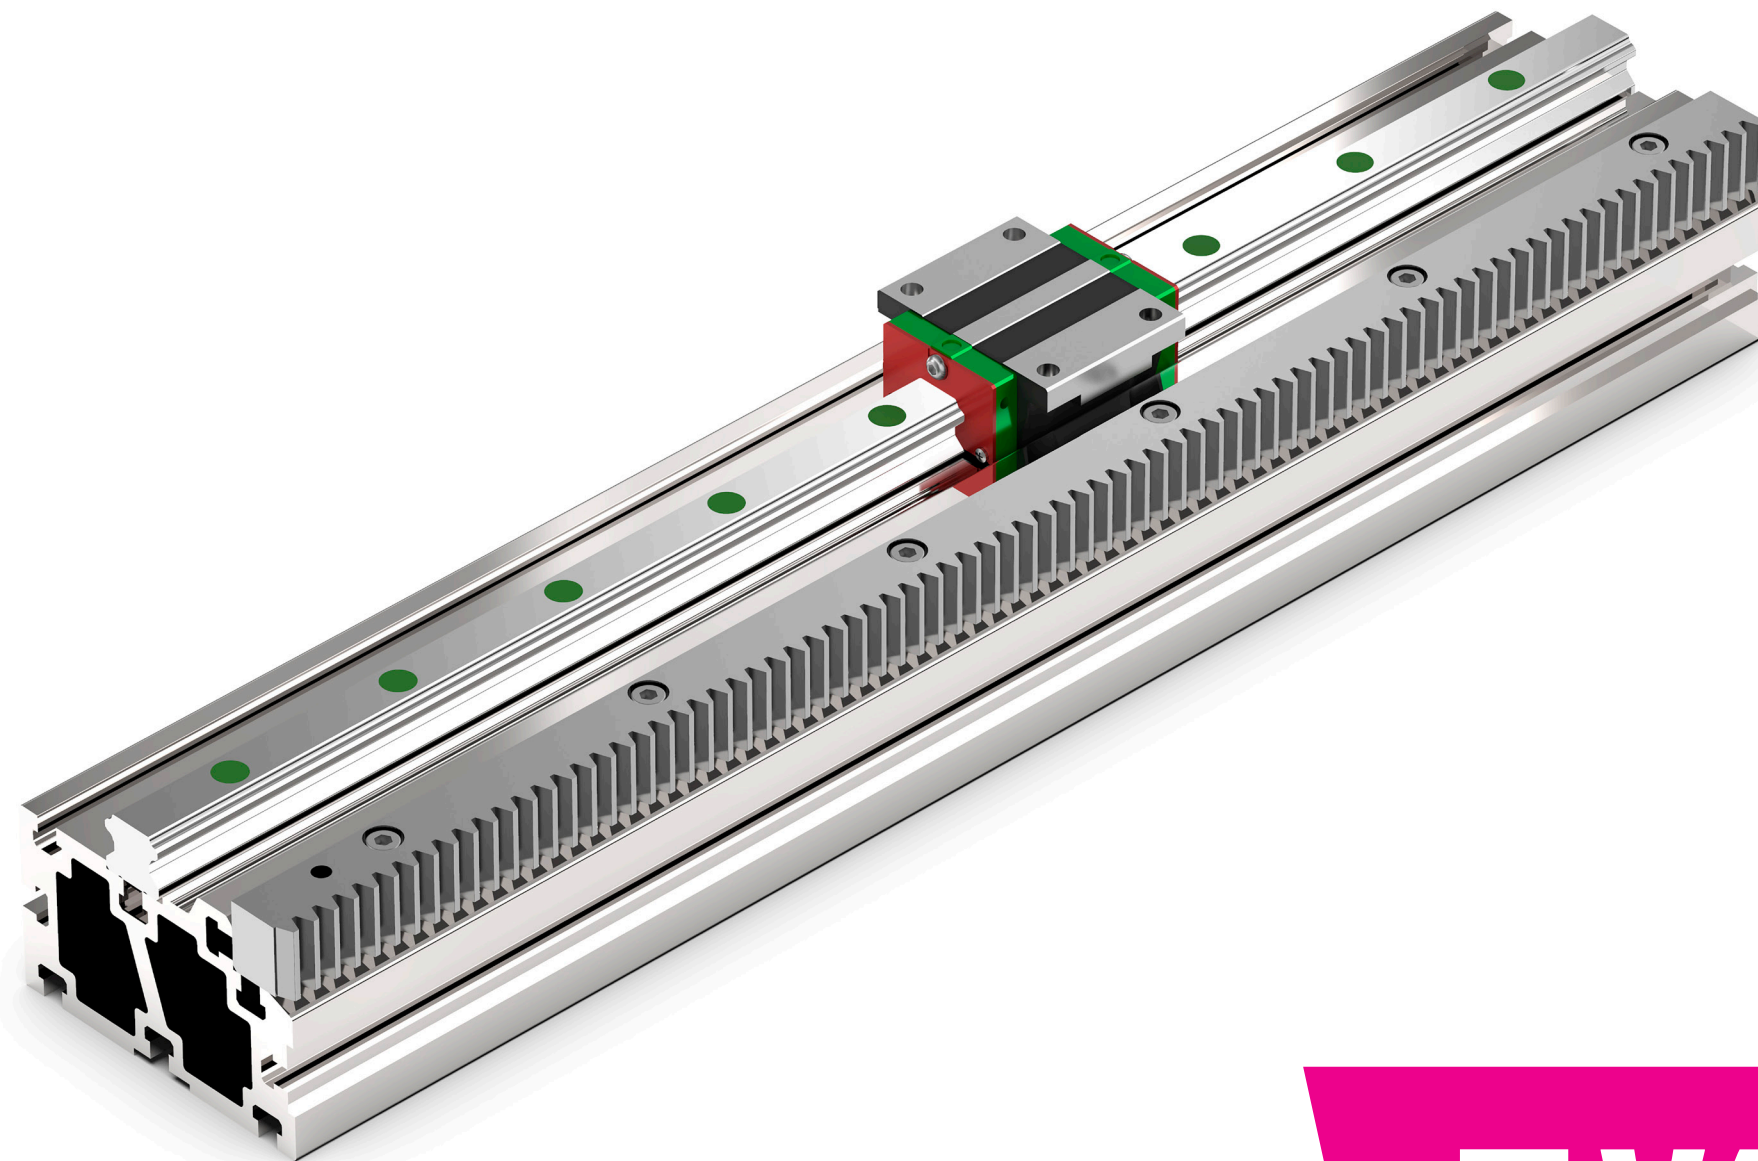

 **VAP**
VANSICHEN ALUMINIUM PROFILE


DATASHEET PROFILE VAP30

VAP30	
Weight	12,64 kg/meter
Material	3.2315 - AlMgSi1
Straightness	0,35 mm/meter
Moment of inertia I_x	1.024,91 cm ⁴
Moment of inertia I_y	333,73 cm ⁴
Max length of one piece	7.000 mm (connectable)
Treatment	Optional
T-Nut	DIN 508 M8

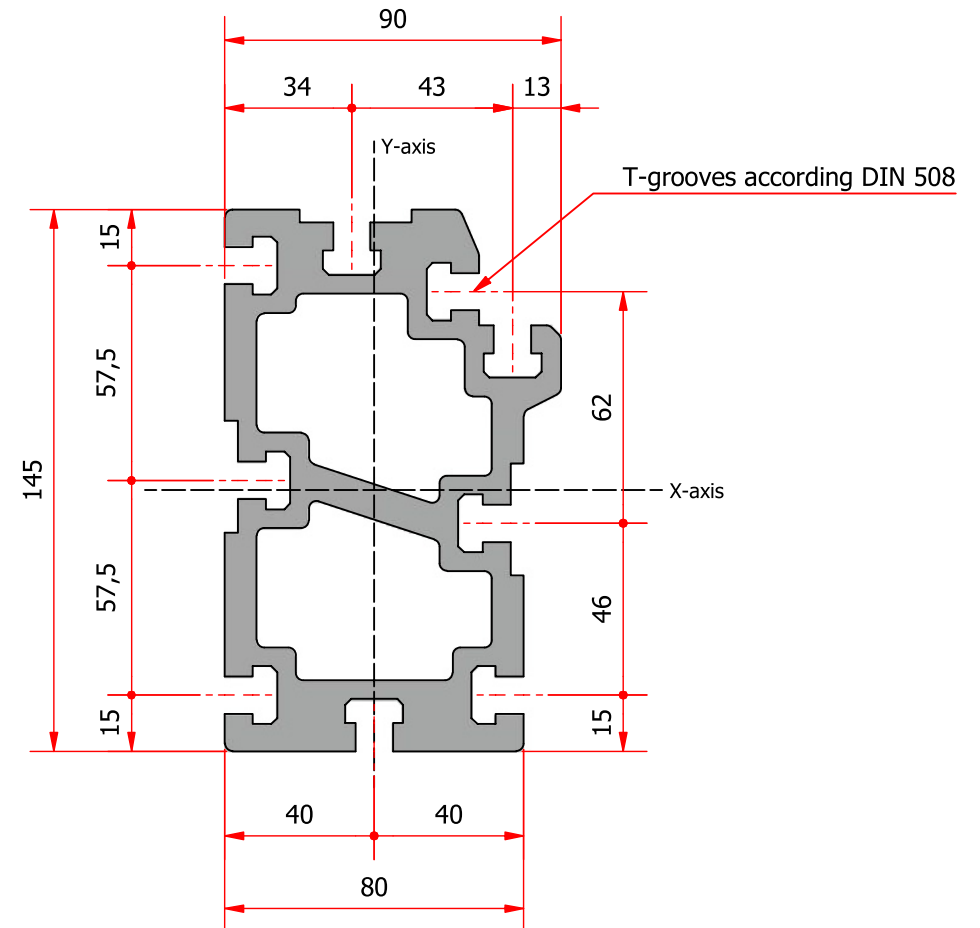


ASSEMBLIES EXISTING VAP30 WITH HIWIN GUIDWAYS HGR30R AND ATLANTA RACKS M3


The VAP30 profile is only as an assembled unit available.

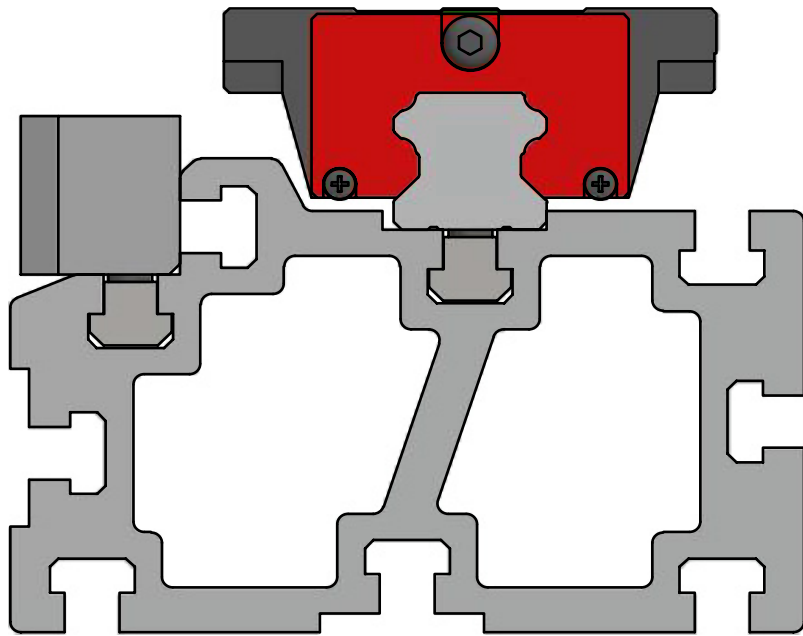


Horizontal – setup A
VAP30HA

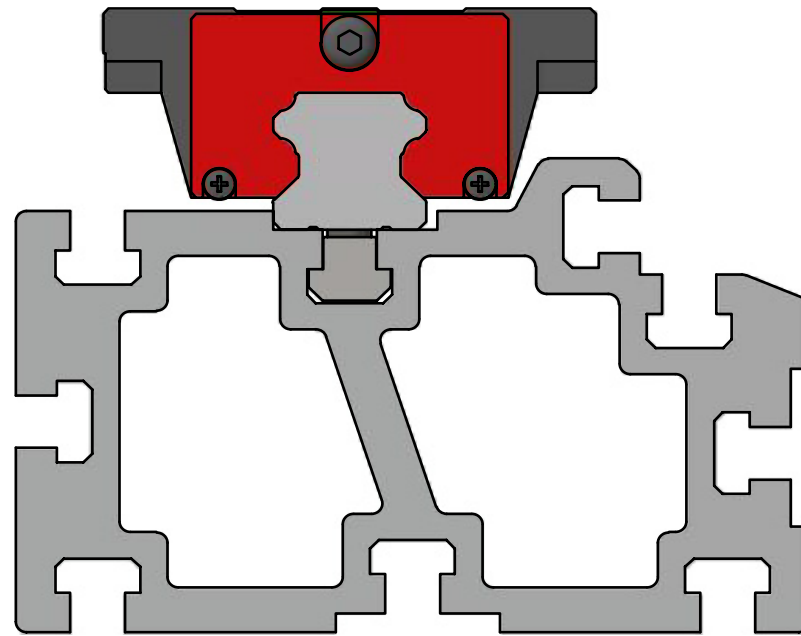


Horizontal – setup B
VAP30HB

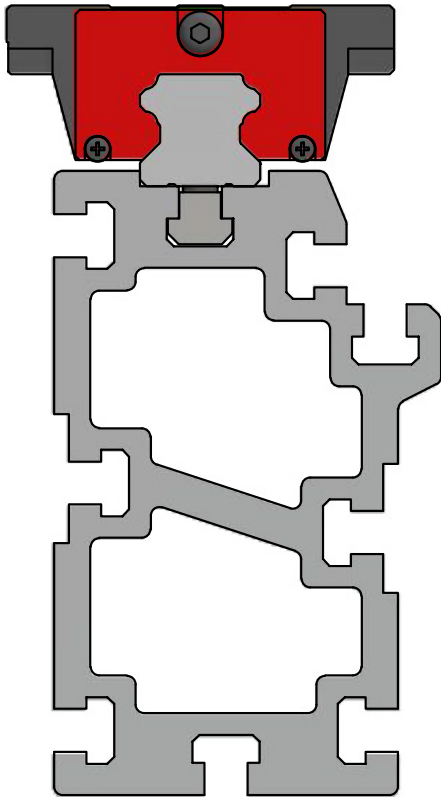

Vertical – setup A
VAP30VA

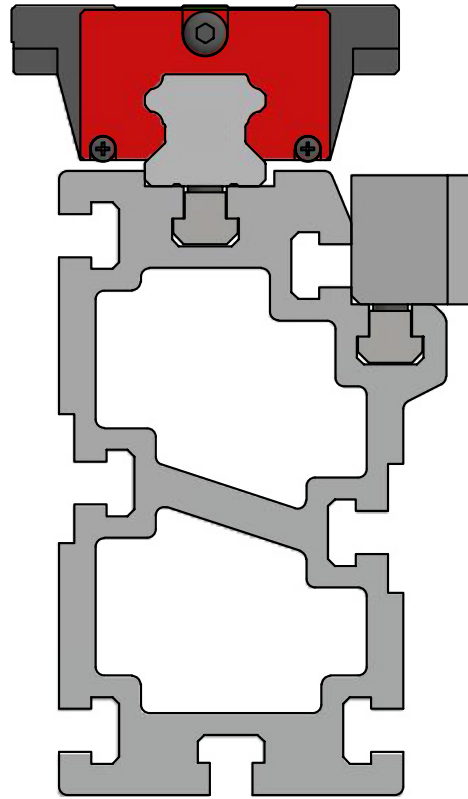

Vertical – setup B
VAP30VB

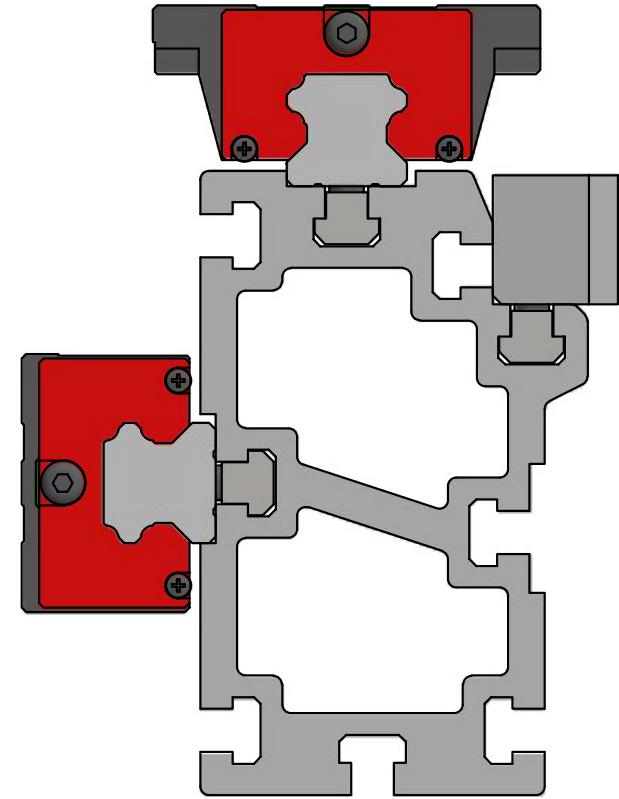

Vertical – setup C
VAP30VC

EXTRA'S


- /// DIN 508 M8 T-Nut available for mounting (per 50)
- /// Pinion
 - Straight tooth system: M3
 - Helical tooth system: M3
- /// Mounting blocks BC 03003

OPTIONS ON DEMAND

- /// Stop buffers
- /// Connecting elements between 2 profiles in parallel
- /// Surface treatments
 - Anodizing coating of the aluminium profile
- /// Coating HIWIN rails: CZS or CTS
- /// Straight toothed gear rack or helical toothed gear rack (M3)
 - Coating on request
- /// Other brands of guideways and racks on request



VAP30HA

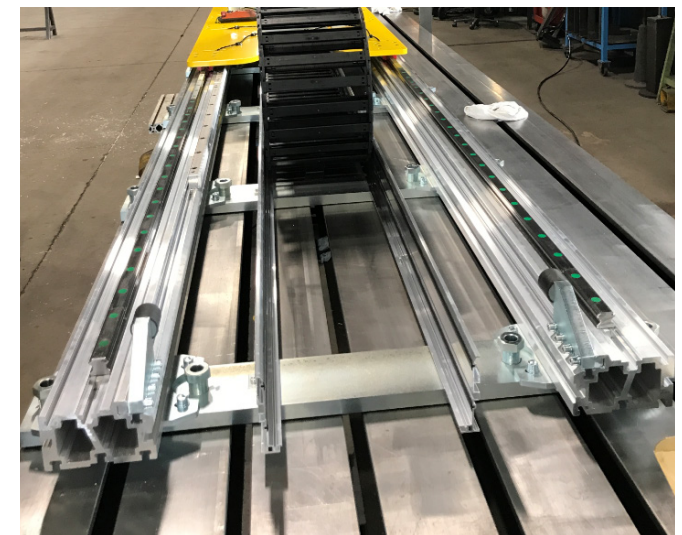

VAP30HB

ORDERING / QUOTATION CODE

VAP30VA	Total Length in mm (up to 100 meters).	Q HIWIN CARRIAGE X		RACK	
VAP30VB		1	HGW30CCZOH	1	Straight toothed gear rack Module 3 Q8
VAP30VC		2	HGW30HCZOH	2	Straight toothed gear rack Module 3 Q10
VAP30HA		3	HGH30CAZOH	3	Helical gear rack Module 3 Q8
VAP30HB		4	HGH30HAZOH	4	Helical gear rack Module 3 Q10

VAP	LENGTH	QUANTITY x HIWIN CARRIAGE	RACK
VAP30VB	7000	8x1	1

Example

If you require any extra's or options on our standard profile, please note in your quotation or order.



CONTACT

HERKENRODESINGEL 4/3
B-3500 HASSELT

T +32(0)11 37 79 63
F +32(0)11 37 54 34

E INFO@VANSICHEN.BE
BTW BE 0872.221.921

 **VANSICHEN**
LINEAR TECHNOLOGY

WWW.VANSICHEN.BE